

Safes and Security Solutions for Homes, Offices and Hotels

Document Safes • Filing Cabinets • Deposit Locker Units
Key Cabinets / Key Management • Strong Room Doors • Cash Drop Safes
Data Media Safes • Electronic In-Room Safes • Minibars



Germany's
NO.1 SAFES
for over
150 YEARS

HARTMANN TRESORE AG is a company with a rich heritage. The company was founded as a blacksmiths and wheelwright's workshop more than 150 years ago and went on to specialize in safes in 1983. To this day, HARTMANN TRESORE AG remains a family-owned company and has gone on to establish itself as one of the leading suppliers of all kind of safes throughout Europe and in the Middle East.

Our workflows and processes are certified by **Vds GmbH** in line with quality management standard **ISO 9001**. Our product range includes tested and certified safes in all sizes for both private and commercial use in line with the Euro standard such as room safes, minibars, drop and deposit safes, locker units, back-of-house safes, key cabinets and key management systems, data media safes, strongroom doors, locks and hazardous cabinets.

As specialists for hotel and room safes, we have provided more than **500,000** safes to some of the top hotel chains in the world. Hoteliers are therefore able to obtain safes and minibars at an optimal price-performance ratio all from one single source: **HARTMANN TRESORE**.

Quality and Service

More than **200,000** customers worldwide place confidence in our innovative ideas and expertise: a combination that can be trusted. There is no such thing as "no can do!" This motto has a tradition within the company. Alongside our standard range and by special request, we also offer individual solutions and special constructions as required by our customers.

We are your competent partners from the first noncommittal consultation - on site if desired - right up to the complete planning and execution phase. Short delivery times and a UAE-wide service complement our comprehensive service package. Our customer care service will be there to support you long after you have purchased with us.

We are there at your side - for sure!

Since 2012 we are operating from Dubai, serving our customers with our own Showroom.

12 Years in Dubai



Documents Safes

Burglar and Fire-proof Safes Series HPKTF 300	4
Burglar and Fire-proof Safes Series HPKTF 400	5
Burglar and Fire-proof Safes Series D 109	6
Burglar and Fire-proof Safes Series HE 10	7
Suspension File Drawer Cabinets Series HTH 220	8
Suspension File Drawer Cabinets Series HFC	8
Suspension File Drawer Cabinets Series HT - 2FRFC	9

Drop and Deposit Safes

Drawer Safes Series SP	10
Drop Safes Series HTME HS 510	11

Data Media Safes

Data Media Safes Series HTFA 081	12
Data Media Safes Series HTFI 190	12
Data Media Safes Series HT FDC	13

Deposit Locker Units

Deposit Locker Units HT DL with stainless steel finish	14
Safe Deposit Box Systems	16

Key Storage Units

Key Cabinets Series HTS 104	18
Key Cabinets Series HTS 105	18
Key Cabinets Series HTS 106	19
Key Cabinets Series HTS 107	19
Key Safes Series HTS 114	20
Key Safes Series HTS 120	20

Key Management

Key and Storage Management Systems	21
------------------------------------	----

Room Safes

Electronic In-Room Safes Series HS 480	22
Electronic In-Room Safes Series HS 470	24
Electronic In-Room Safes Series HS 420	26
Digital Top-Open Safe Series HS 481	27

Minibars

Minibars	28
Minibars Peltier Cooling Series HTM T	29
Drawer Type Minibars Series HTMDT	30
Minibars Absorption Cooling System Series HTM A	31

General Information

Security Locks	32
Security Levels	34
Fire Testing Procedures	35
SÜPERB SAFES	36
SIGNATURE SAFES by Hartmann	37
Our References	38

Burglar and Fire-Proof Safes

HARTMANN TRESORE's burglar and fire-proof safe for home and offices are ideal for the secure storage of money, files and documents – for example, personnel records, book keeping records and customer records. The safes are available in different sizes. All safes are tested and certified in accordance to the European standard by independent certification authorities.



Burglar and fire-proof safe
HPKTF 300-01



Burglar and fire-proof safe
HPKTF 300-10



Burglar and fire-proof safe
HPKTF 300-04



Burglar and fire-proof safe
HPKTF 300-03

Burglar and Fire-Proof Safes Series HPKTF 300

Security level A according to VDMA 24992 (05/95) and
S 1 according to EN 14450
Quality grade LFS 30 P
Fire protection according to EN 15659

Construction

- Double-walled door
- Double-walled corpus
- All-round bolt locking system
- Fixture for floor anchorage
- Door opening angle of 180°

Lock

- HPKTF 300 -01 to -04 : PIN-Code electronic lock (battery operated) with emergency key.
- HPKTF 300 -08 to -11 : Double-bit security lock (incl. 2 keys)

Basic Configuration

- Single-door: DIN right-hinged door
- Double-door: DIN right/left-hinged door
- Height adjustable compartment shelves (see table)
- Lacquered finish RAL 7024 dark anthracite / RAL 7035 light grey

Back Office Safes Series HPKTF 300	Ext. dimensions h x w x d (in mm)	Int. dimensions h x w x d (in mm)	Weight in kg	Volume in litres	No. of Doors	No. of shelves	No. of Box files
HPKTF 300-01	370 x 490 x 455	229 x 355 x 293	40	24	1	1	3
HPKTF 300-03	470 x 490 x 455	329 x 355 x 293	46	34	1	1	4
HPKTF 300-04	670 x 490 x 455	529 x 355 x 293	61	55	1	1	6
HPKTF 300-08	1870 x 700 x 510	1729 x 565 x 348	188	340	1	4	35
HPKTF 300-09	1170 x 950 x 510	1029 x 815 x 348	162	292	2	2	30
HPKTF 300-10	1870 x 950 x 510	1729 x 815 x 348	234	490	2	4	50
HPKTF 300-11	1870 x 1300 x 510	1729 x 1165 x 348	302	701	2	4	70

Burglar and Fire-Proof Safes

Burglar and fire-proof safes protect important documents and larger amounts of cash not only from theft, but also in case of fire.



Burglar and Fire-Proof Safes Series HPKTF 400

Security level B according to VDMA 24992 (05/95) and S 2 according to EN 14450
Quality grade LFS 30 P
 Fire protection according to EN 15659



Burglar and fire-proof safe
HPKTF 400-02

Construction

- Double-walled door
- Double-walled corpus
- All-round bolt locking system
- Fixture for floor anchorage
- Door opening angle of 180°

Lock

- Double-bit security lock (incl. 2 keys)

Basic Configuration

- Single-door: DIN right-hinged door
- Double-door: DIN right/left-hinged door
- Height adjustable compartment shelves (see table)
- Lacquered finish RAL 7035 light grey



Burglar and fire-proof safe
HPKTF 400-07



Burglar and fire-proof safe
HPKTF 400-04

Back Office Safes Series HPKTF 400	Ext. dimensions h x w x d (in mm)	Int. dimensions h x w x d (in mm)	Weight in kg	Volume in litres	No. of Doors	No. of shelves	No. of Box files
HPKTF 400-01	375 x 495 x 472	229 x 355 x 293	57	24	1	1	2
HPKTF 400-02	475 x 385 x 472	329 x 245 x 293	56	24	1	1	3
HPKTF 400-03	475 x 495 x 472	329 x 355 x 293	66	34	1	1	4
HPKTF 400-04	675 x 495 x 472	529 x 355 x 293	85	55	1	1	4
HPKTF 400-05	825 x 495 x 472	679 x 355 x 293	97	71	1	1	8
HPKTF 400-06	1175 x 705 x 527	1029 x 565 x 348	172	202	1	2	21
HPKTF 400-07	1525 x 705 x 527	1379 x 565 x 348	210	271	1	3	28

Burglar and Fire-Proof Safes Series D 109
Resistance grade I

Burglar protection according to EN 1143-1

Grade 60 P

Fire protection according to EN 1047-1

Construction

- Sandwiched multi-walled construction
- Door thickness 105 mm
- Extra strong construction
- Multilateral bolt locking system
- All-round fire insulation
- Fixture for floor anchorage


**FIRE PROTECTION
60 minutes**
Lock

- Double-bit security lock (incl. 2 keys)

Basic Configuration

- DIN right hinged door
- Door opening angle of 180°
- Height adjustable compartment shelves (see table)
- Lacquered finish RAL 7035 light grey



Burglar and fire-proof safe D 109-04


 Additional sizes
on request

 Burglar and fire-proof safe D 109-07
Optional : Lacquered finish RAL 1023 traffic yellow

Back Office Safes Series D 109	Ext. dimensions h x w x d in mm	Int. dimensions h x w x d in mm	Weight in kg	Volume in litres	No. of Doors	No. of shelves	No. of Box files
D 109-02	482 x 589 x 471	381 x 477 x 306	144	60	1	1	5
D 109-03	615 x 589 x 471	514 x 477 x 306	170	81	1	2	5
D 109-04	801 x 589 x 471	700 x 477 x 306	215	110	1	2	10
D 109-05	1137 x 704 x 471	1036 x 592 x 306	330	202	1	3	21
D 109-06	1322 x 704 x 471	1221 x 592 x 306	365	238	1	3	21
D 109-07	1507 x 704 x 471	1406 x 592 x 306	395	274	1	3	28
D 109-16	1884 x 886 x 545	1783 x 774 x 380	586	556	1	4	45
D 109-19	1884 x 975 x 559	1783 x 863 x 380	701	605	2	4	50
D 109-26	1884 x 1282 x 696	1783 x 1170 x 517	951	1106	2	4	70

Burglar and Fire-Proof Safes Series HE 10

Security level B Burglar protection to VDMA 24992 Stand 05/95
Quality grade S 120 P Fire proof according to EN 1047-1

Construction

- Overall door thickness 134 mm
- All-round multi-walled corpus and door, with high-strength special filling
- All-round bolt locking system
- Fixture for floor anchorage

Lock

- Double-bit security lock (incl. 2 keys)

Basic Configuration

- DIN right-hinged door
- Door opening angle of 180°
- Height adjustable compartment shelves (see table)
- Lacquered finish RAL 7035 light grey



Burglar and fire-proof safe HE 10-03

Optional: Lacquered finish RAL 5002 ultramarine blue



Burglar and fire-proof safe HE 10-01

Back Office Safes Series HE 10	Ext. dimensions h x w x d in mm	Int. dimensions h x w x d in mm	Weight in kg	Volume in litres	No. of Doors	No. of shelves	No. of Box files
HE 10-01	489 x 605 x 560	273 x 448 x 359	168	47	1	1	3
HE 10-02	590 x 605 x 560	374 x 448 x 359	187	65	1	1	5
HE 10-03	1050 x 605 x 560	769 x 448 x 340	323	126	1	2	10
HE 10-04	1400 x 794 x 560	1109 x 637 x 331	483	253	1	2	21
HE 10-05	1600 x 794 x 560	1309 x 637 x 331	577	299	1	3	28
HE 10-06	1800 x 794 x 560	1509 x 637 x 331	708	344	1	3	28
HE 10-07	1800 x 1350 x 560	1505 x 1193 x 331	995	643	2	3	56
HE 10-08	1800 x 1766 x 560	1505 x 1609 x 331	1215	867	2	8	80



Suspension File Drawer
Cabinet HTH 220-04



Series HTH 220

Security level A, Burglar protection according to VDMA 24992 (05/95) and **S1 Burglar protection** according to EN 14450

Construction

- Single-walled corpus, 3 mm
- Double-walled drawer doors 60 mm
- Drawers can be barred from two sides

Lock

- Double-bit security lock on each drawer (incl. 2 keys per drawer)

Basic Configuration

- Drawers on lightweight telescopic runners
- Lacquered finish RAL 7035 light grey

Option

- Electronic Lock

Suspension File Drawer Cabinets Series HTH 220	Exterior dimensions h x w x d in mm	Weight in kg	No. of drawers
HTH 220-01	412 x 550 x 600	63	1
HTH 220-02	696 x 550 x 600	107	2
HTH 220-03	981 x 550 x 600	151	3
HTH 220-04	1266 x 550 x 600	196	4
HTH 220-05	1550 x 550 x 600	240	5



Fire Proof Filing Cabinets are designed to protect documents against fire.

Series HT - 1FRFC

NEW! 1 - HOUR Fire Resistant Filing Cabinets.
P Certified 60 Paper by RISE



Suspension File Drawer
Cabinet HT-1FRFC

Construction

- Fire resistance 1 hour
- Drawer capacity – 40 kg
- All filing cabinets are specified with a central high security key lock
- Electrostatic powder coating is applied to all sides, including bottom. The finish is scratch-resistant, providing a lifetime quality appearance.
- Anti-tilt device

Lock

- Key lock

Basic Configuration

- Lacquered finish RAL 9002 ivory

Options

- Additional drawers can be specified with individual key lock.

Suspension File Drawer Cabinets Series HT-1FRFC	Exterior dimensions h x w x d in mm	Weight in kg	No. of drawers
HT-1FRFC 200 K	722 x 528 x 675	145	2
HT-1FRFC 300 K	1064 x 528 x 675	206	3
HT-1FRFC 400 K	1406 x 528 x 675	266	4

Series HT - 2FRFC

NEW! 2 - HOUR Fire Resistant Filing Cabinets.
P Certified 120 Paper by RISE

Lock

- Double bit key lock
- Drawers can be barred from two sides, individually locking, 4 eye principle

Options

- Digital Lock
- Pincode + Fingerprint Lock

Colour

- RAL 9002 (Grey White)



Drawer
Inside: 254 x 384 x 505
Capacity: 49L



Suspension File Cabinet
HT - 2FRFC 220



Suspension File Cabinet
HT - 2FRFC 320



Suspension File Cabinet
HT - 2FRFC 420



P (SWEDEN)

RISE, Research
Institutes of Sweden
Fire Test Approved
(60P/90P/120P)



P (SWEDEN)

RISE, Research
Institutes Testing and
Research Institute Data
Safe Passed in Fire Test



P (SWEDEN)

RISE, Research
Institutes Testing and
Research Institute
Double Door Safe
passed in Fire Test



**FIRE PROTECTION
120 minutes**

Suspension File Drawer Cabinets Series HT - 2FRFC	Exterior dimensions h x w x d in mm	Weight in kg	No. of Drawers
HT - 2FRFC 220	824* x 570 x 700	180	2
HT - 2FRFC 320	1166* x 570 x 700	250	3
HT - 2FRFC 420	1508* x 570 x 700	320	4

* Height includes 60mm Wheels

* Drawer Inside : 254 x 384 x 505 (49L)

HARTMANN Drop and Deposit Safes

Drop and deposit safes are the ideal solution to quickly and securely store larger sums of cash even during day-to-day business operations, for example in a restaurant, in a bar or at a reception desk. Employees can drop their waiter wallets or moneybags into the safe via a drawer or flap, which means that the safe does not have to be opened. The dropped contents remain non-returnable until authorized personnel, for example the business owner or account manager removes the contents.

Drawer Safes Series SP

HARTMANN drawer safes from the SP series are ideal as an add-on solution when securing larger amounts of cash in an uncomplicated and quick way.

Construction

- In line with security level B burglar protection according to VDMA 24992
- All-round double-walled corpus
- Door leaf 6 mm
- Double-walled door 80 mm
- Door and corpus filled with high-quality fire-proof insulation according to DIN 4102
- All-round fire fold
- Fixture for floor and wall anchorage
- Retraction block that stops removal of the dropped contents via the drawer

- Compartment shelves
- (1 or 2, according to safe size)
- DIN right-hinged door
- Lacquered finish RAL 7035 light grey

Lock

- Main door and drawer with double-bit security lock (includes 2 keys)

Options

- Electronic lock (also for the drawer)
- 2 mechanical double-bit security locks (4-eyes principle)
- Deposit drawer at the back of the safe
- Protruding deposit drawer
- Comes specially equipped if desired

Configuration / Functionalities

- The especially smooth-running drawer construction runs on maintenance-free telescopic runners. The contents to be dropped fall into the drop tray as soon as the drawer is fully closed.

Ideal as an under-the-counter safe



Drawer Safe SP 765

- Collection tray 300 mm high
- With retraction block



Drawer Safe SP 1265

Optional: SP 1065 with backside drawer opening



Drawer Safe SP 1065

Drawer Safes Series SP	Ext. dimensions h x w x d** in mm	Interior dimensions h x w x d in mm	Weight in kg	Volume in litres	No. of shelves
SP 765	750 x 640 x 530	490 x 520 x 350	300	89	1
SP 1065	1030 x 670 x 500	730* x 550 x 380	300	153	1
SP 1265	1230 x 670 x 500	930* x 550 x 380	300	194	2
SP 1465	1430 x 670 x 500	1130* x 550 x 380	300	236	2

* Height includes a drop tray height of 300 mm **Exterior depth including fitting

Drop Safes Series HTME HS 510

The dropped contents fall to the bottom and can only be removed by authorized personnel. The deposit chute is secured with a lock.

Construction

- In line with security level A burglar protection according to VDMA 24992
- Double-walled door
- Door thickness 45 mm
- Fitted with front flap for cash strongboxes
- Fixture for floor and wall anchorage

Configuration

- Lacquered finish RAL 7035 light grey
- DIN right-hinged door

Lock

- Main door with double-bit security lock (includes 2 keys)
- Deposit flap with cylinder lock

Options

- Electronic lock
- 2 mechanical double-bit security locks (4-eyes principle)



Drop Safe HTME HS 510-03



Drop Safe HTME HS 510-04



Drop Safe HTME HS 510-100



Detailed view of the closed drop compartment



Detailed view of the drop compartment

Drop Safes Series HTME HS 510	Exterior dimensions h x w x d in mm	Interior dimensions h x w x d in mm	Weight in kg	Volume in litres
HTME HS 510-03	600 x 250 x 250	367 x 232 x 183	27	16
HTME HS 510-80	800 x 250 x 250	567 x 232 x 183	34	24
HTME HS 510-100	1000 x 250 x 250	767 x 232 x 183	42	33
HTME HS 510-04	600 x 460 x 460	249 x 442 x 393	55	43
HTME HS 510-81	800 x 460 x 460	449 x 442 x 393	68	78
HTME HS 510-101	1000 x 460 x 460	649 x 442 x 393	81	112

Data Media Safes

In fires, most of the matters at home or in the office turn into a handful of ashes because of the high heat to 800-1000°C. Computer media for back up storage such as USB's, CD's, DVD's, DLT (Digital Linear Tape) and hard drives may be easily damaged in heat (above 50°C) or humidity (above 85%).



**FIRE PROTECTION
60 minutes**



Data Media Safe HTFA 081-01

Also available in resistance grade II
according to EN 1143 - 1

Series HTFA 081

Security level A

according to VDMA 24992 (05 / 95)

Quality grade S 60 DIS

Fire protection according to EN 1047 - 1

Construction

- Door strength 95 mm
- Multi-walled corpus and door
- All-round bolt locking system
- Door and corpus filled with high-quality fire-proof insulation
- Base height 85 mm
- DIN right-hinged door

Lock

- Double-bit security lock (incl. 2 keys)

Options

- Extendable drawers
- Vertically extending door

Data Media Safes Series HTFA 081	Ext. dimensions h x w x d in mm	Int. dimensions h x w x d in mm	Weight in kg	Volume in litres
HTFA 081-01	635 x 563 x 630	400 x 368 x 397	197	58
HTFA 081-02	635 x 563 x 755	400 x 368 x 522	222	77



**FIRE PROTECTION
120 minutes**



Data Media Safes HTFI 190-03

Also available in resistance grade II
according to EN 1143 - 1

Image with optional features



Series HTFI 190

Resistance grade I

Burglar protection according to EN 1143 - 1

Quality grade S 120 DIS

Fire protection according to EN 1047 - 1

Construction

- Overall door strength 151 mm
- Multi-walled corpus and door
- All-round bolt locking system
- Door opening angle 180°
- Height-adjustable compartment shelves
- DIN right-hinged door

Lock

- Electronic lock with a customisable code of up to 14 digits

Basic Configuration

- Ready for floor mounting
- Lacquered finish RAL 7035 light grey

Data Media Safes Series HTFI 190	Ext. dimensions h x w x d in mm	Int. dimensions h x w x d in mm	Weight in kg	Volume in litres	No.of Shelves
HTFI 190-01	1143 x 714 x 662	887 x 493 x 388	433	170	2
HTFI 190-02	1143 x 800 x 730	887 x 579 x 456	501	234	2
HTFI 190-03	1300 x 800 x 730	1044 x 579 x 456	560	276	3
HTFI 190-04	1456 x 886 x 798	1200 x 665 x 524	707	418	4

Data Media Safes

The HT FDC series are constructed as a regular fire safe and has a multilayer anti-thermo insert to block heat, smoke and humidity.

Series HT FDC with Data Inserts

Data: Grade for the media to be stored at less than 50°C in fire. (Available Media - 3.5", CD)

Diskette: Grade for the media to be stored at less than 30°C in fire. (Available Media - 3.5", CD)



Lock

- Electronic Pin Code Lock with handle, user code with 4 -16 digits, master code system and low battery warning.

Lock Option

- Finger Print and Electronic Pin Code Lock with handle, operates with finger prints or user code (user code with 4 -16 digits), 128 finger prints acceptable, master code system and low battery warning.



HT FDC 1535



HT FDC 1540




HT FDC 1550



HT FDC 1560

Safes have 2 Interval Sections



Insert for model
HT FDC 1535 and
HT FDC 1540



Insert for model
HT FDC 1550
and HT FDC 1560



PASSED THE WORLD-CLASS CERTIFICATION AUTHORITY TESTS

Safes passed in fire test by world class fire testing institutes, Sweden (RISE) and United States (UL).



FIRE TEST

Safes are designed to block heat and smokes from outside so that they can protect the inside matters.



WATERPROOF TEST

In assumption of sprinklers' spraying and civil defense in a fire.



DROP TEST

The drop test ensures that the contents are safe in case a building collapses in a fire and the safe falls or breaks down.



CERTIFIED BY RISE

90 Data 90 Diskette / 120 Data 120 Diskette
(Certified No. 164907)

Data Media Safes Series HT FDC	Ext. dimensions h x w x d in mm	Paper Section			Data Section			Weight in kg
		Int. dimensions h x w x d in mm	Shelf / Tray in pc	Fire Class	Int. dimensions h x w x d in mm	Shelf Tray in pc	Fire Class	
HT FDC 1535	695 x 500 x 500	305 x 380 x 330	1 / 1	90 Paper	104 x 275 x 231	-	90 Data, 90 Diskette	100
HT FDC 1540	876 x 520 x 520	466 x 380 x 330	1 / 1	90 Paper	104 x 275 x 231	-	90 Data, 90 Diskette	132
HT FDC 1550	1020 x 655 x 560	335 x 475 x 350	1 / 1	120 Paper	339 x 372 x 251	2	120 Data, 120 Diskette	223
HT FDC 1560	1220 x 655 x 560	535 x 475 x 350	1 / 1	120 Paper	339 x 372 x 251	2	120 Data, 120 Diskette	250

Deposit Locker Units

with stainless steel fronts... a service that your guests are bound to value!



Construction

- Deposit Lockers can be assembled in a modular way (please see options on next page)
- Locker doors have a thickness of 3 mm. The door is of finely polished stainless steel. Doors are hinged DIN right.
- The wall have a thickness of 2 mm. The standard colour is black powder coating.
- Consecutive vertical numbering of all compartments.

- Pedestal
- Pull-out table
- Frontal frieze

Lock

- Hotel/Bank lock with pre-lock and post-lock. Hotel lock: 2 keys; Guest lock system: each compartment with separate locking system with 2 keys per compartments. Hotel and Guest locking via a joint double-bit security.

Accessories Included:

- Inner metal boxes for HT DL 24, HT DL 12, HT DL 8 and HT DL 6/3 (4 boxes), wall thickness 1, 2 mm.



Modular
construction


Door fronts
of polished
stainless steel




Sample Locker Unit with stainless steel fronts

Locker Units Series HT DL	Exterior dimensions h x w x d in mm	Interior dimensions h x w x d in mm	No. of Compartments	Weight in kg
HT DL 24	920 x 635 x 430	72 x 260 x 390	24	132
HT DL 12	920 x 635 x 430	146 x 260 x 390	12	103
HT DL 8	920 x 635 x 430	220 x 260 x 390	8	94
HT DL 6	920 x 635 x 430	294 x 260 x 390	6	88
HT DL 6/3	920 x 635 x 430	146 x 260 x 390 220 x 260 x 390 516 x 260 x 390	2 2 2	84-88
HT DL 4	920 x 635 x 430	442 x 260 x 390	4	78
HT DL 2	920 x 635 x 430	886 x 260 x 390	2	73


Construction Examples

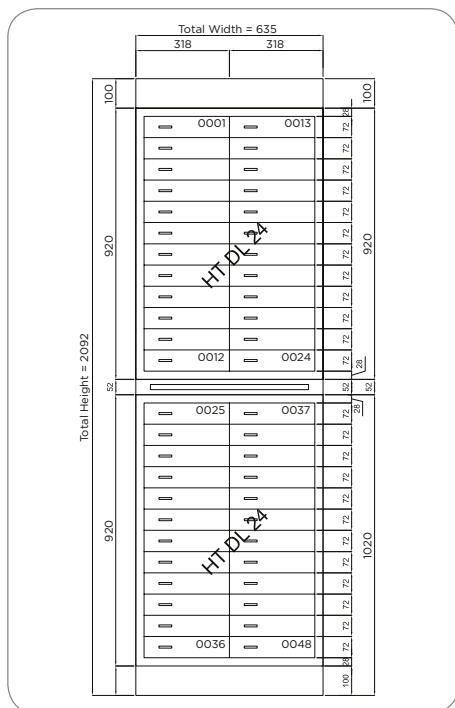


Option 1

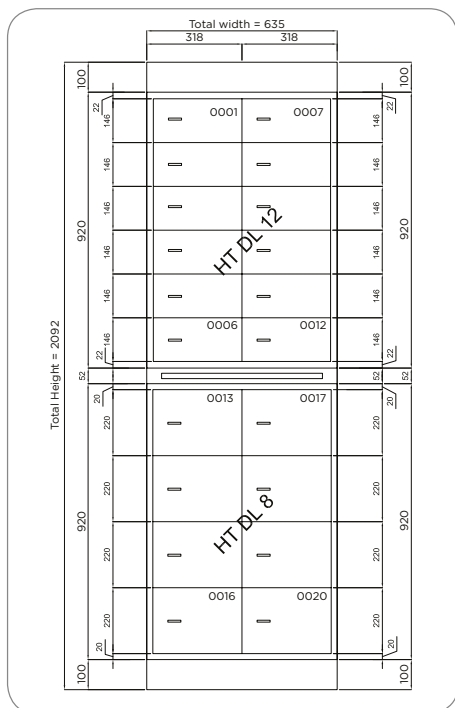


Option 2

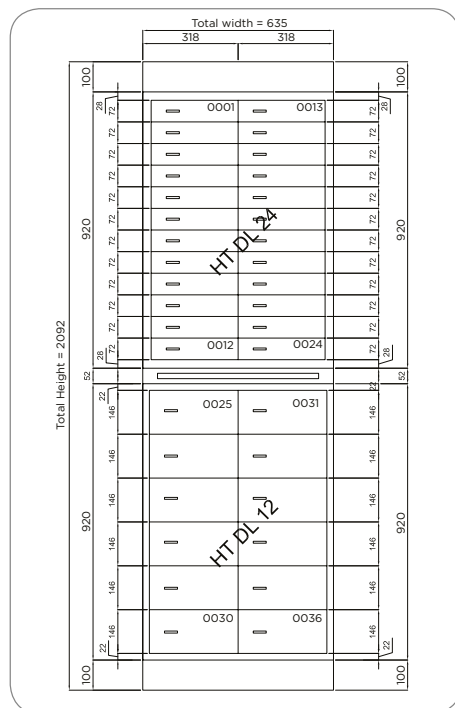


Option 3

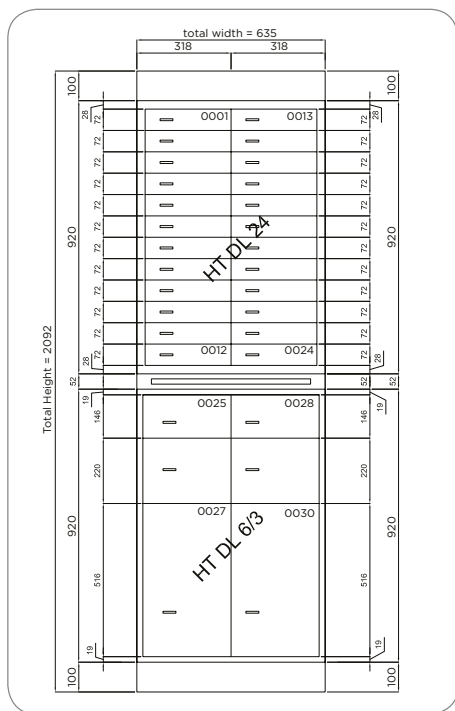

Option 4

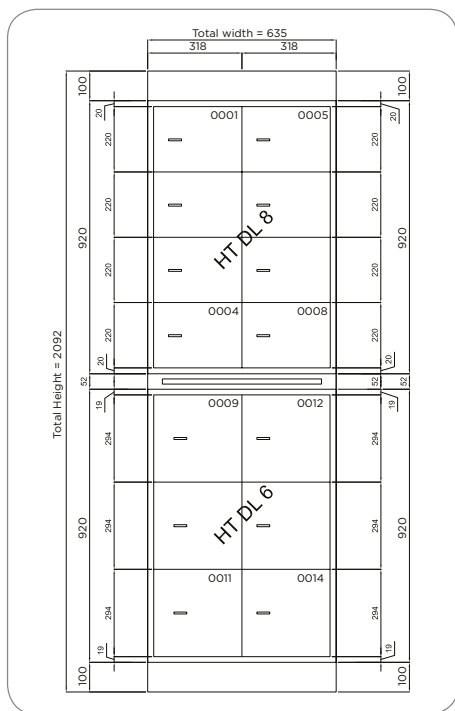

Option 5

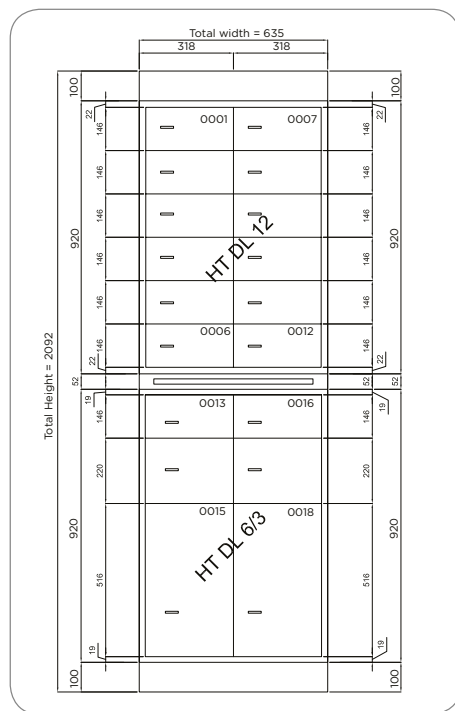

Option 6



Option*: Insert cassette for small sized compartments



Option*: Insert cassette for big sized compartments



Option*: Pull-out table



Option*: Frontal frieze

Please ask us
for a drawing
of your
individual
configuration

* All Options: Please order separately

The M model Series

The M model safe deposit box system is notable for its innovative lock system. It can operate with profile cylinder keys or with a digital code lock. The intelligent technology of the M series safe deposit box system has been developed and patented in Germany, assuring you of the highest quality.

The Lock

Each safe is fitted with a profile cylinder lock that has a stainless steel housing. Its installed security cylinder can be actuated both manually and electronically.

- The lock housing is made from solid 1.5mm stainless steel, attached to the base plate with two threaded steel screws
- Solid 8mm thick and 18mm high stainless steel bolt
- The bolt closes by means of a security cylinder
- Three keys, integrated in a lock system plan with a security card
- The cylinder lock is certified in accordance with Vds DIN EN1303 (attack resistance 2, lock security 4)
- The key locks through two levels with a security card
- The lock cylinder is protected against drilling
- Electronically actuated safes are operated contactlessly from the lock side.

Central Locking

Every vertical column of safe deposit boxes has a central locking bolt above the top safe which closes by means of a security cylinder. The central locking enables the individual safe doors to be released if there is a power failure.

The Body

2mm-thick powder-coated sheet steel forms the solid base frame of the M model series. The floor, top and shelves (of 2mm sheet steel) are welded to the body to prevent torsion. The shelves form horizontally consistent levels. They extend to the front edge and prevent each safe door from distortion.

The Safe Deposit Box Doors

The safe deposit box doors are made from matt-brushed 3mm-thick stainless steel. They are bevelled on their long sides and mounted onto a continuous 8mm round-bolt hinge. With their precise workmanship, the safe doors harmonize to present a visually appealing and technically sophisticated front. The continuous black numbering of the safe deposit boxes rounds off their striking overall appearance.

“Our patented locking system secures our reputation”



Highest quality, Made in Germany

Safe Deposit Box Sizes

The safe deposit boxes are available in the following heights (in mm): 50, 75, 100, 150, 200, 300, 400, 600. All our deposit boxes up to a height of 200mm are equipped with a removable plastic insert box.

Appearance

The safe deposit box system has carefully crafted stainless steel trims that give the M model series its timeless elegance.

The Overall External Dimensions of One Section

Total height:	1,910mm
Total depth:	430mm
Total width:	320mm
Base:	80mm
Top trim panel:	10mm



Stable, top-quality stainless steel housing



Easily removable insert boxes Plastic




Valuables securely protected from unauthorised access



Plastic insert boxes in sizes that fit precisely

Seamlessly Integrated Into It Systems

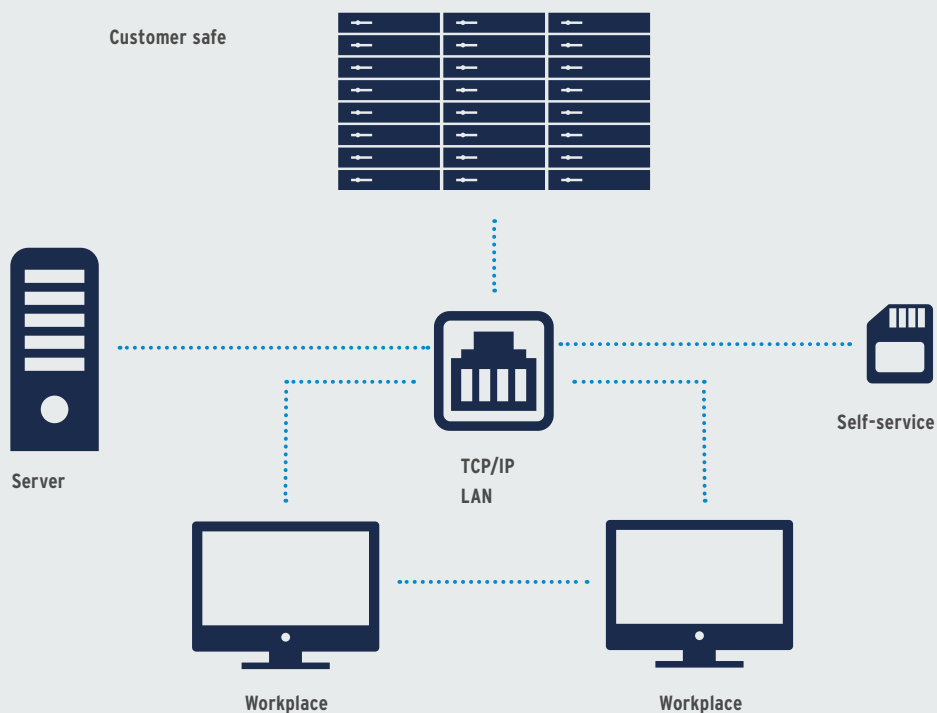

HARTMANN Key Cabinets

HARTMANN Key Cabinets / Key Safes offer customized and perfect key management solutions. They are available in different security levels and with different equipment and furnishing options.



Key Cabinet HTS 104-03

Key Cabinets Series HTS 104

Construction

- Single-walled door
- All round single-walled corpus
- Fixture for mounting to a wall

Lock

- Cylinder lock (incl. 2 keys)

Basic Configuration

- DIN right-hinged door
- Adjustable hook rack, different colours, consecutively numbered
- Lacquered finish RAL 7035 light grey

Key Cabinets Series HTS 104	Exterior dimensions h x w x d in mm	Weight in kg	No. of hooks
HTS 104-02	255 x 190 x 80	2	20
HTS 104-03	255 x 190 x 130	2	20
HTS 104-04	305 x 230 x 80	2	25
HTS 104-05	305 x 230 x 80	2	30
HTS 104-06	305 x 230 x 80	2	35
HTS 104-07	305 x 245 x 130	3	42
HTS 104-08	305 x 245 x 130	3	49
HTS 104-09	305 x 245 x 130	4	84



Key Cabinet HTS 105-06

Key Cabinets Series HTS 105

Construction

- Single-walled door
- All round single-walled corpus
- Fixture for mounting to a wall

Lock

- Cylinder lock (incl. 2 keys)

Basic Configuration

- DIN right-hinged door
- Adjustable hook rack, different colours, consecutively numbered
- Lacquered finish RAL 7035 light grey

Key Cabinets Series HTS 105	Exterior dimensions h x w x d in mm	Weight in kg	No. of hooks
HTS 105-02	350 x 270 x 80	3	42
HTS 105-04	450 x 300 x 80	4	64
HTS 105-05	550 x 380 x 80	5	50
HTS 105-06	550 x 380 x 80	6	100



Key Cabinets HTS 106-02

Key Cabinets Series HTS 106

Construction

- Single-walled door
- All round single-walled corpus
- Fixture for mounting to a wall


Lock

- Cylinder lock (incl. 2 keys)

Basic Configuration

- DIN right-hinged door
- Adjustable hook rack, different colours, consecutively numbered
- Lacquered finish RAL 7035 light grey

Key Cabinets Series HTS 106	Ext. dimensions h x w x d in mm	Weight in kg	No. of hooks
HTS 106-01	550 x 380 x 140	9	150
HTS 106-02	550 x 380 x 140	10	200
HTS 106-03	550 x 380 x 205	12	250
HTS 106-04	550 x 380 x 205	13	300

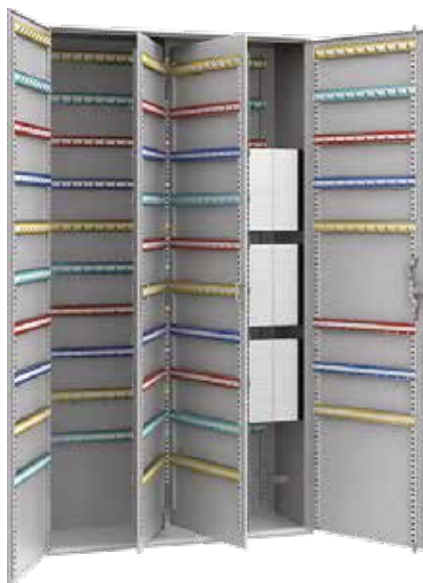

Key Cabinets HTS 107-07

Key Cabinets Series HTS 107 - Double Doors

Construction

- Single-walled wing doors
- All-round single-walled corpus
- Flat front thanks to enclosed doors with all-round border
- Fixture for mounting to a wall

Lock

- Cylinder lock (incl. 2 keys)

Basic Configuration

- Individually adjustable key racks
- Adjustable hook rack, different colours, consecutively numbered
- Lacquered finish RAL 7035 light grey

Key Cabinets Series HTS 107	Exterior dimensions h x w x d in mm	Weight in kg	No. of hooks
HTS 107-02	550 x 730 x 80	15	200
HTS 107-03	550 x 730 x 140	19	300
HTS 107-04	550 x 730 x 140	20	400
HTS 107-05	550 x 730 x 205	26	500
HTS 107-06	550 x 730 x 205	26	600
HTS 107-07	1300 x 730 x 250	59	780
HTS 107-08	1300 x 730 x 250	60	860
HTS 107-09	1300 x 730 x 250	60	940
HTS 107-10	1300 x 730 x 250	61	1020
HTS 107-11	1300 x 730 x 250	62	1170

Key Safes Series HTS 114

Security level A according to VDMA 24992 (05 / 95) and **S1** according to EN 14450

Construction

- Double-walled door 57 mm
- All-round single-walled corpus 3 mm
- Trilateral locking system
- Fixture for mounting to a wall

Lock

- Double-bit security lock (incl. 2 keys)

Basic Configuration

- DIN right-hinged door
- 2 doors: DIN right and DIN left
- Individually adjustable hook racks in different colours, consecutively numbered
- Lacquered finish RAL 7035 light grey



Key Safe HTS 114-02

Key Safes Series HTS 114	Ext. dimensions h x w x d in mm	Weight in kg	No. of hooks	No. of doors
HTS 114-01	436 x 460 x 120	22	70	1
HTS 114-02	636 x 460 x 120	34	100	1
HTS 114-03	636 x 460 x 200	47	150	1
HTS 114-04	636 x 460 x 200	48	200	1
HTS 114-05	636 x 460 x 300	53	300	1
HTS 114-06	636 x 812 x 200	75	400	2
HTS 114-07	636 x 812 x 300	86	600	2



Key Safe HTS 120-07

Key Safes Series HTS 120

Security level B according to VDMA 24992 (05 / 95) and **S2** according to EN 14450

Construction

- Double-walled door 78 mm
- All-round double-walled corpus
- All-round fire fold
- Full pullout partition walls on telescopic runners

Lock

- Double-bit security lock (incl. 2 keys)

Options

- Also available with resistance grade I according to EN 1143-1
- Electronic lock

Basic Configuration

- DIN right-hinged door
- Individually adjustable hook racks in different colours
- Lacquered finish RAL 7035 light grey

Key Safes Series HTS 120	Ext. dimensions h x w x d in mm	Weight in kg	No. of hooks	No. of partition walls
HTS 120-01	600 x 500 x 500	200	320	4
HTS 120-02	800 x 500 x 500	200	400	4
HTS 120-03	600 x 636 x 500	300	600	6
HTS 120-04	800 x 636 x 500	300	980	7
HTS 120-05	1000 x 636 x 500	300	1400	7
HTS 120-07	1200 x 636 x 500	300	1960	7
HTS 120-08	1500 x 806 x 500	350	2560	8
HTS 120-10	1500 x 806 x 500	350	3200	10
HTS 120-12	1800 x 806 x 500	450	4000	10

The future of key administration and asset management.

Integrated PC with
touch screen for easy operation



Contactless RFID technology -
Little wear and tear - long lifetime



RFID card reader saves costs - you can use
your existing staff ID cards (optional)



Fingerprint scanner for
maximum security (optional)



Multilingual user interface:
English, German, French, Arabic,....



Integrated alarm
in case of power failure



Web and USB connections for
managing the system remotely
and backing up the database




E-mail alert for
important events (optional)



Time limitation - set up
and manage access times



Deposit boxes - Can be extended
with boxes in different sizes(optional)



USB connection in the deposit
boxes to keep electronic devices
always ready to use (optional)



Deposit boxes with
internal key holders for storing
large bunches of keys (optional)



**Request
your catalogue:
+971 4 380 8099**

Light indicator -
Selected keys are easier to find



Weight sensors (optional)



Electronic In-Room Safes Series HS 480

The room safes of the HS 480 series are specially adapted to the needs of the modern 5* hotel industry. The attractive appearance with the elegant control unit is just as impressive as the convenient locking and opening via RFID card or by entering a PIN code. Model HS 480-04 also offers a power socket for charging laptops, smartphones and other electrical devices. The series is available in three different sizes



Construction

- Continuous, harmonious appearance due to laser-cut manufacturing process
- Corpus 2 mm thick
- Solid door leaf, 5 mm thick
- Door overall thickness: 50mm

Configuration / Functionalities

- Elegant rubber keypad meets ADI standard for disabled
- Ready for wall or floor mounting (mounting material included)
- DIN right-hinged door (optional: DIN left-hinged door)
- Door with spring-loaded auto-open function
- Extra bright LED interior lighting
- Flooring: Carpet
- Operation with 4 x 1.5V Alkaline Batteries (included)
- Display: LED Display in white
- Low battery warning

- Control Panel: Black
- Lock: Electronic key-pad lock with operation via RFID (room card) or freely selectable 3 to 6-digit PIN code
- Emergency opening: mechanical master key or by individually adjustable master code
- Manual: English and Arabic
- Model HS 480-04 with 230-volt Internal universal socket to recharge laptops, mobile phones, etc ,including 3 m cable and British plug

Finish

- Black (powder coated)

Options

- Emergency Opening: Electronic handheld unit (CEU)
- Audit Trail function for last 500 operations with handheld unit



Electronic In-Room Safe HS 480-01



Electronic In-Room Safe HS 480-02



Electronic In-Room Safe HS 480-04

Electronic In-Room Safes Series HS 480

New!

Also
available in
non-battery
operated
version



Socket according to
the VDE standard on
the HS 480-04 model



Extra bright LED
interior lighting



Operation via RFID
room card



Easy-to-use
keypad lock



Padded safe
interior floor



Cable length of
3 meters on
HS 480-04 model

Electronic In-Room Safes Series HS 480	Exterior dimensions h x w x d* (in mm)	Interior Dimensions h x w x d* (in mm)	Suitable Laptop Size	Weight in kg
HS 480-01	190 x 360 x 410	175 x 357 x 353	14"	12
HS 480-02	190 x 420 x 370	175 x 417 x 313	15.6"	13
HS 480-04	190 x 420 x 370	175 x 417 x 313	15.6"	13
HS 480-05	190 x 508 x 380	175 x 505 x 323	17"	15

* All depth data refer to safe corpus only. For overall depth including control panel, add 10 mm to this value.

Electronic In-Room Safes Series HS 470

The HARTMANN Electronic In-Room Safes combine cutting-edge security with modern design and easy handling. The matt finish and the silver- coloured lines lend the safe a look that is both sophisticated and stylish.

Construction

- Corpus 1.5 mm thick
- Solid door leaf, 5 mm thick

Configuration / Functionalities

- Electronic keypad lock with freely selectable 3- to 6-digit code
- Buttons each with particularly bright LED lightning
- Easy-to-read LED display in white
- Storage and readout of the last 100 operations
- Silver-coloured control panel
- Motor-driven opening and closing via 2 x 20 mm solid locking bolts
- Freely selectable hotel-only master code
- Emergency opening using the emergency key included in delivery (master key)
- Ready for wall or floor mounting

- Mounting materials included in the delivery
- Operation with commercially available alkaline batteries (AA, 4 x 1.5V), included in the delivery
- Spring loaded door
- Battery status indicator
- LED interior lighting
- Padded flooring in the safe
- Bilingual operating instructions (English and Arabic)
- DIN right-hinged door

Finish

- Anthracite (powder coated)

Options

- DIN left-hinged door
- Audit trail unit incl. software

Design - Display With White LED Lights



Electronic In-Room Safe HS 470-03



Electronic In-Room Safe HS 470-04



Electronic In-Room Safe HS 470-03



Electronic In-Room Safe HS 470/S5



Electronic In-Room Safe HS 470-04



With LED interior lighting



Spring loaded door



Optional: Audit trail unit

Electronic In-Room Safes Series HS 470	Exterior Dimensions h x w x d* in mm	Volume in litres	Suitable Laptop Size	Weight in kg
HS 470-01	190 x 360 x 460	30	15.6"	12
HS 470-02	190 x 450 x 495	40	17.3"	14
HS 470-03	200 x 360 x 370	25	13"	10
HS 470-04	200 x 420 x 370	29	15.6"	12
HS 470/S5	536 x 355 x 464	86	17.3"	25

* All depth data refer to safe corpus only. For overall depth including control panel, add 20 mm to this value.

Electronic In-Room Safes Series HS 420

Also available as a Superlaptop Safe for 17-inch notebooks!

Construction

- Corpus 1.5 mm thick
- Solid door leaf, 4 mm thick

Configuration / Functionalities

- Electronic key-pad lock with freely selectable 3- to 6-digits code
- Easy-to-read LED display
- Storage of the last 100 operation entries of the safe
- Motor-driven opening and closing via 2 x 20 mm solid locking bolts
- Freely selectable hotel-only master code
- Emergency opening using the emergency key (master key)
- Operation with commercially available alkaline batteries (AA, 4 x 1.5V), included in the delivery

- LED inside
- Battery status indicator
- Spring loaded door
- Padded flooring in the safe
- Ready for wall or floor mounting
- Mounting materials included in the delivery
- Colour: "Black" (powder coated)
- DIN right-hinged door
- Bilingual operating instructions (English and Arabic) included

Options

- DIN left-hinged door
- Audit trail unit incl. software



Electronic In-Room Safe
HS 420-01



Electronic In-Room Safe
HS 420-02



Electronic In-Room Safe
HS 420-05



Electronic In-Room Safe
HS 420/S5



Bolt locking
system



With LED Interior
Lighting



Interior floor
is padded



Easy-to-use
keypad lock



Digital with
emergency key



Optional: Audit
trail unit

Electronic In-Room Safes Series HS 420	Exterior dimensions h x w x d* in mm	Volume in litres	Suitable Laptop Size	Weight in kg
HS 420-01	200 x 350 x 270	17	Tablet - PC	8
HS 420-02	200 x 420 x 370	29	15.4"	11
HS 420-05	190 x 508 x 380	35	17.3"	13
HS 420/S5	536 x 355 x 464	36	17.3"	25

* All depth data refer to safe corpus only. For overall depth including control panel, add 10 mm to this value.

Digital Top Open Safe Series HS 481

The HARTMANN Electronic Top Open Safe combines cutting-edge security with modern design and easy handling. The matt finish and the silver-coloured lines lend the safe a look that is both sophisticated and stylish. The top open safe can be fitted into a drawer to save space. Ergonomic with a comfortable overview!



Compliant with
European Standards

Construction

- Corpus 1.5 mm thick
- Solid door leaf, 2 mm thick

Configuration / Functionalities

- Electronic key-pad lock with freely selectable 3- to 6-digit code
- Buttons each with particularly bright LED lightning
- Easy-to-read LED display
- ADA compliant keypad
- Motor-driven opening and closing via 2 x 20 mm solid locking pins
- Freely selectable hotel-only master code
- Emergency opening using the emergency key (master key)
- Operation with commercially available alkaline batteries (AA, 4 x 1.5V), included in the delivery
- Storage of the last 100 operation entries of the safe
- Battery status indicator
- New: alt. RFID / NFC operation
- Ready for floor mounting (Fixing material included)

- LED-Interior lighting
- Bilingual operating instructions (English and Arabic) included
- Padded flooring in the safe

Finish

- Matt Black (powder coated)


Options

- Reader unit incl. software
- 230 V socket to recharge laptops, mobile phones etc.
- Ivory finish



Laptop Safe 15"

Digital Top Open Safe HS 481-01



With LED Interior Lighting



With hydraulic opening system



Well-readable display



Bolt locking system



Convenient handle

Digital Top Open Safe Series HS 481	Exterior dimensions h x w x d in mm	Volume in litres	Suitable Laptop Size	Weight in kg (net)
HS 481-01	127 x 400 x 350	17	15"	10

HARTMANN Minibars – Energy Efficient, Silent and Comfortable

Offer your guests more comfort with a minibar! You can offer your guests snacks and chilled beverages at any time of the day or night without them having to leave the room. The new generation minibars are energy efficient, silent and vibration free.



Modern Cooling Systems

We generally distinguish between three different types of cooling technology: compressor cooling, absorption cooling and thermoelectric cooling according to the Peltier principle. HARTMANN minibars are available with Peltier cooling because nowadays energy consumption is more relevant. Models with compression cooling are, only available on request since this technology is comparatively louder in operation and susceptible to more maintenance work same as absorption cooling.

HARTMANN Minibars with Peltier Cooling

Peltier technology requires electric current for the cooling process. The direct conversion of electric power to energy for cooling allows Peltier minibars to optimally utilize the use of energy. There is no need for a cooling unit so that the minibar offers more interior space for chilled goods. Thanks to fuzzy logic control, the Peltier minibars can be regulated automatically so that icing does not occur.

Highlights at a Glance:

- Very low power consumption
- Totally noise and vibration free operation
- No moving parts
- No maintenance required
- Environmental friendly
- More space inside the Peltier minibars
- No defrosting due to Fuzzy-logic temperature control
- Multiple fields of applications: various models and sizes for use in hotels of all kind of categories but also in hospitals and clinics, student accommodations, meeting rooms and offices.



GMARK certificate



Intertek certificate

Minibar Model HTM T30/ HTM T40/ HTM T65

30, 40 and 65-litres volume minibars with Peltier cooling system.
The minibar is also available with glass door for especially attractive presentation of snacks and drinks.

30, 40, 65 litres - class
Peltier Cooling
Configuration / Functionalities

- Non-wearing Peltier thermoelectrics
- Fuzzy logic control system for low energy consumption
- No moving parts – 100% silent and vibration free*
- Ammonia-free and therefore environmentally friendly
- Temperature can be lowered max. 23 °C below that of the outside temperature
- Maximum cooling temperature: 6 °C, to save energy
- Transparent, height-adjustable and removable plastic shelves
- Soft LED interior light with door contact
- Colour: black

*HTM T 65- 01 will have a fan for internal air circulation

Optional Features

- With sliding hinge to mount the minibar door to the door of a built-in cabinet
- Lock
- DIN right-hinged door with changeable door hinge for conversion to a DIN left- hinged door



Minibar HTM T 30 - 02 FD



Minibar HTM T 40 - 01 FD



Height-adjustable shelves



Door drinks holder



LED interior light



Minibar HTM T 40 - 01 GD

Model	Ex. dimensions h x w x d in mm	Weight in kg (net)	Volume in litres (gross)	Performance in watt	Voltage volts	Energy consumption kWh / p.a.	No. of shelves
HTM T 30-02 FD	480 x 380 x 445	10	30	58	AC 220-240	125	1
HTM T30-01 GD (with glass door)	480 x 380 x 445	10	30	58	AC 220-240	90	1
HTM T 40-01 FD	545 x 405 x 445	14	40	58	AC 220-240	164	2
HTM T 40-01 GD (with glass door)	545 x 405 x 445	11	40	58	AC 220-240	97.85	2
HTM T 65-01 FD	635 x 474 x 450	15	65	83	AC 220-240	144	2
HTM T 65-01 GD (with glass door)	635 x 474 x 450	17	65	83	AC 220-240	203	2

* Average energy consumption per year at an ambient temperature of 25 °C and a cooling temperature of 6 °C according to EN 1060/2010

Note: Please follow proper minibar installation instruction by Hartmann Tresore.

Minibar Model HTM DT45-01 FD

The Drawer Type Minibar is a new concept with a pull out drawer so drinks and snacks inside are well visible and accessible from above. The 45 ltr. Minibar comprises one big part for bottles and cans and an automatic slide-out for mini bottles and snacks. It is illuminated by LED light and can be organized with adjustable dividers.

The drawer type minibar is available in black decorative panel with handle or prepared for built-in in furniture with customizable wooden panel.

45 litres - class

Peltier Cooling

Configuration / Functionalities

- Drawer design
- Non-wearing thermoelectric (Peltier) system
- Low energy consumption
- CFC free; environmental friendly
- Adjustable dividers and bottle-fingers for secure storage
- Automatic slide-out tray for mini bottles and snacks
- LED interior light with drawer contact
- Colours: corpus in black; interior in white
- Adjustable drinks divider to optimize the space
- Storage volume 45 ltrs.

- Power supply 220/230V
- Performance in watts 65W
- Dimensions: H 420 x W 495 x D455 in mm
- Standard: decorative panel with handle

Optional Features

- Panel without handle for furniture integration
- Snack tray



Minibar HTM DT45-01 FD



Sleek design handle



Drinks holder



Snack Tray (optional)

Model	Ex. dimensions h x w x d in mm	Weight in kg (net)	Volume in litres (gross)	Performance in watt	Voltage volts	Energy consumption kWh / p.a.	No. of divider
HTM DT45 - 01 FD	420 x 495 x 455	11.5	45	58	AC 220-240	98	3

* Average energy consumption per year at an ambient temperature of 25 °C and a cooling temperature of 6 °C according to EN 1060/2010

Note: Please follow proper minibar installation instruction by Hartmann Tresore.

Minibar Series HTM A

HARTMANN minibars with absorption cooling. The absorption minibars are cooled with a mixture of gas and water that liquefies in a condenser.

An evaporator turns it back into gas. The cooling takes place at this part of the cycle. HARTMANN minibars defrost automatically.

The classical yet modern design harmonies into any interior with ease. Adjustable shelving allows for the flexible setup and stocking of the minibar. The HARTMANN minibar is maintenance free, noiseless during operation, vibration free and energy efficient.

Configuration/Functionalities

- Fully automatic defroster and easy-to-use refrigeration regulator
- Available with foam door or glass door
- LED interior lighting with door contact
- DIN right-hinged door with changeable door hinge for conversion to a DIN left-hinged door
- With sliding hinge to mount the minibar door to the door of a built-in cabinet
- Height adjustable and removable metal shelves
- Door opening angle of 180°
- Colours: corpus in black; interior in white
- All-round magnet door seals to ensure optimum closure

30, 40, 60 litres - class

Absorption Cooling



HTM A40-06 FD



HTM A40-06 GD



HTM A30-06 FD

Model	Ex. dimensions h x w x d in mm	Weight in kg (net)	Volume in litres (gross)	Performance in watt	Voltage volts	Energy consumption kWh / p.a.	No. of shelves
HTM A30-06 FD	480 x 400 x 420	13.2	30	65	AC 220-240	310	1
HTM A30-06 GD (with glass door)	480 x 400 x 415	15.2	30	65	AC 220-240	365	1
HTM A40-06 FD	550 x 400 x 440	14.8	40	65	AC 220-240	310	2
HTM A40-06 GD (with glass door)	550 x 400 x 435	17	40	65	AC 220-240	365	2
HTM A60-06 FD	560 x 485 x 500	18.5	60	80	AC 220-240	365	2
HTM A60-06 GD (with glass door)	560 x 485 x 495	20.8	60	80	AC 220-240	419	2

* Average energy consumption per year at an ambient temperature of 25 °C and a cooling temperature of 6 °C according to EN 1060/2010

Note: Please follow proper minibar installation instruction by Hartmann Tresore.

Security Locks

Our safes and strong room doors are equipped as standard with a double-bit high-security lock with at least two double-bit keys.

We would like to offer you a selection of different locks, handles and fittings for your safe and strong room door. However, please note that not every safe can be combined or equipped with every lock, handle or fitting.

We are happy to advise you on the right selection of Security Lock and Handle.

Biometric Locking System - FINKEY

- Innovative
- Secure
- Convenient



Electronic Pin Code Lock

Our Bestseller
- available with
mechanical
emergency key!



Multikey Locking System

The combination of
high security lock and
RFID reader.

- Contactless
- Secure
- Convenient




Electronic Pin Code Locks

Various options



4

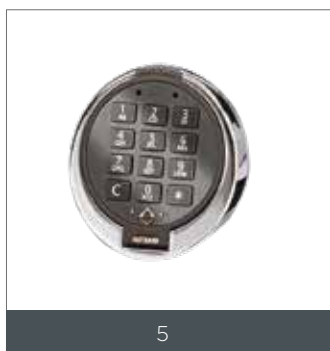

5



6



7


Biometric Locking System - FINKEY

Various options

- New VdS - certified biometric system
- Opening of the electronic lock only by identification of a single finger
- Programming capacity of up to 100 fingerprints
- Twice the protection by two security components: Finger print and strong electronic lock
- Easy and comfortable operation
- Optional with mechanical emergency key
- High-quality materials and precise manufacturing
- Made in Germany



8

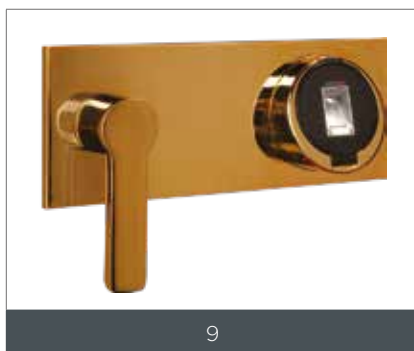

9



10




11

Double-Bit High-Security Lock


Various options



12

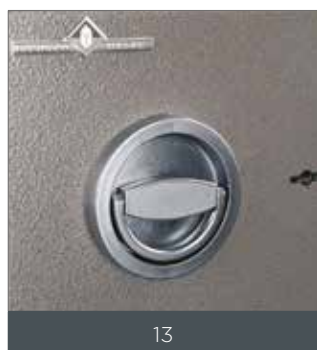

13

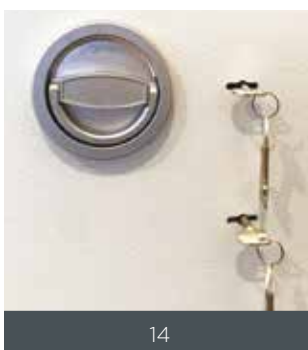

14

Burglary security level	Insurance sum in Euro*		Security feature	Short description
	commercial	private		
Security level A according to VDMA 24992	To be agreed with the property insurer		-	Single-walled steel body, double-walled door
Security level B according to VDMA 24992	from 300 kg up to 10,000.00	Wall safes (walled in according to instructions) and stand-alone safes from 200 kg up to 40,000. -	Limited burglary protection fire-proof according to DIN 4102	All-round fire fold, fire-resistant insulation in the walling; wall safe: double-walled door, single-walled body; furniture or business safe: completely double-walled
S1 according to EN 14450	2,500.00	5,000.00	200 SU	Single-walled corpus, double-walled door, all-round fire fold
S2 according to EN 14450	2,500.00	20,000.00	400 SU	Single/double-walled corpus, double-walled door
Resistance Grade N (0) according to EN 1143-1	10,000.00	40,000.00	Tested burglar-proof according to guaranteed resistance unit 30/30	All cabinets with VdS-classes have a multi-walled door and body. The different resistance grades are reached by: the number, the material and the strength of the walls, as well as the fillings in the walls (e.g. special concrete filling with armoured matting).
Resistance Grade I according to EN 1143-1	20,000.00	65,000.00	Tested burglar-proof according to guaranteed resistance unit RU 30/50	
Resistance Grade II according to EN 1143-1	50,000.00	100,000.00	RU 50/80	
Resistance Grade III according to EN 1143-1	100,000.00	200,000.00	RU 80/120	
Resistance Grade IV according to EN 1143-1	150,000.00	400,000.00	RU 120/180	
Resistance Grade IV KB according to EN 1143-1	250,000.00	To be agreed with the property insurer	RU 120/180 KB: RU 1000	
Resistance Grade V according to EN 1143-1	250,000.00		RU 170/270	
Resistance Grade V KB according to EN 1143-1	375,000.00		RU 170/270 KB: RU 1000	

The abbreviations in the table stand for:

SU = Security Unit (resistance of security cabinets against burglary)

RU = Resistant Unit (resistance of value containers against burglary)

VDMA = Verband Deutscher Maschinen- und Anlagebau (German Association for Mechanical Engineering and Installation)

VdS = VdS Schadenverhütung GmbH (formerly Verband der Schadensversicherer e.V.) (Vds Loss Prevention)

Security Grades According to VDMA

Steel cabinets can be referred to as security grade A and B respectively, according to VDMA 24992, if the standards of the VDMA 24992 standard sheet (edition May 1995), as manufacturing specifications for these cabinets, are met. Market observation is inapplicable after withdrawal of the standard sheet by the issuing VDMA. Compliance with the regulations is however ratified by the nameplate on our safes (own conformance statement).

VdS Standards

The basis for a VdS certification is the test and the acceptance procedure according to the European test specifications for safes. This test specification is based on a draft standard that has been developed by the CEN (European Committee for Standardization). This test guarantees quality control according to uniform standards and serves as a verification of security features, that is then used by insurers to determine the insurance cover sum. All VdS tested safes have the respective certificate in the form of a test badge on the inside of the door.

Fire Security Classes	Insurance sum in Euro*	Security feature	Short description
Quality grade LFS 30 P according to EN 16659	To be agreed with the property insurer	30 minutes fire-proof for paper	Protection against fire, smoke and extinguishing water through special fillings and seals. The safes are available in different burglar security classes
Quality grade LFS 60 P according to EN 16659		60 minutes fire-proof for paper	
Quality grade S 60 P according to EN 1047-1		60 minutes fire-proof for paper	
Quality grade S 120 P according to EN 1047-1		120 minutes fire-proof for paper	
Quality grade S 60 DIS according to EN 1047-1		60 minutes fire-proof for data media	
Quality grade S 120 DIS according to EN 1047-1		120 minutes fire-proof for data media	

* By connecting your safe to a VdS recognized burglar alarm system (BAS) you will increase - as a general rule double - the respective insurance sum.

Fire Protection

Steel cabinets with security grade A offer more protection against fire than a normal cabinet or wardrobe. For safes with security grade B the heat generated in the safe is reduced by fire-resistant insulation according to DIN 4102 and an all-round fire fold. Given that the fire service can get to a fire site within an average of approximately 27 minutes, this protection is more than sufficient in many cases. VdS tested cabinets/safes offer increased fire protection.

It is important to note however, that only safes that have been tested as fire-proof are actually safe from fire!

Safe protection from fire is tested according to EN 1047-1 and EN 1047-2, and EN 15659. Once a safe has passed the respective test, it is given its respective test badge according to RAL-RG 626/7.


Testing Procedures for Fire-Proof and Fire-Protected Safes

Fire-proofing and fire protection get test for in accordance with European standards. The most important standards are: EN 1047-1 (data security safes and disc inserts) and EN 15659 (light fire-proof cabinets).

Fire-Proof Safes According to EN 1047-1 – The “Braunschweig Test”

Safes with fire-protection according to EN 1047-1 protect the contents from fire, smoke and extinguishing water for 60 or 120 minutes. The hardest of all fire tests is carried out at the Institute for Material Testing at the University of Technology in Braunschweig (MPA).

The test is split up into two parts: the fire resistance test and the fire burst and drop test. This test can last for up to 24 hours. (Please see below.)

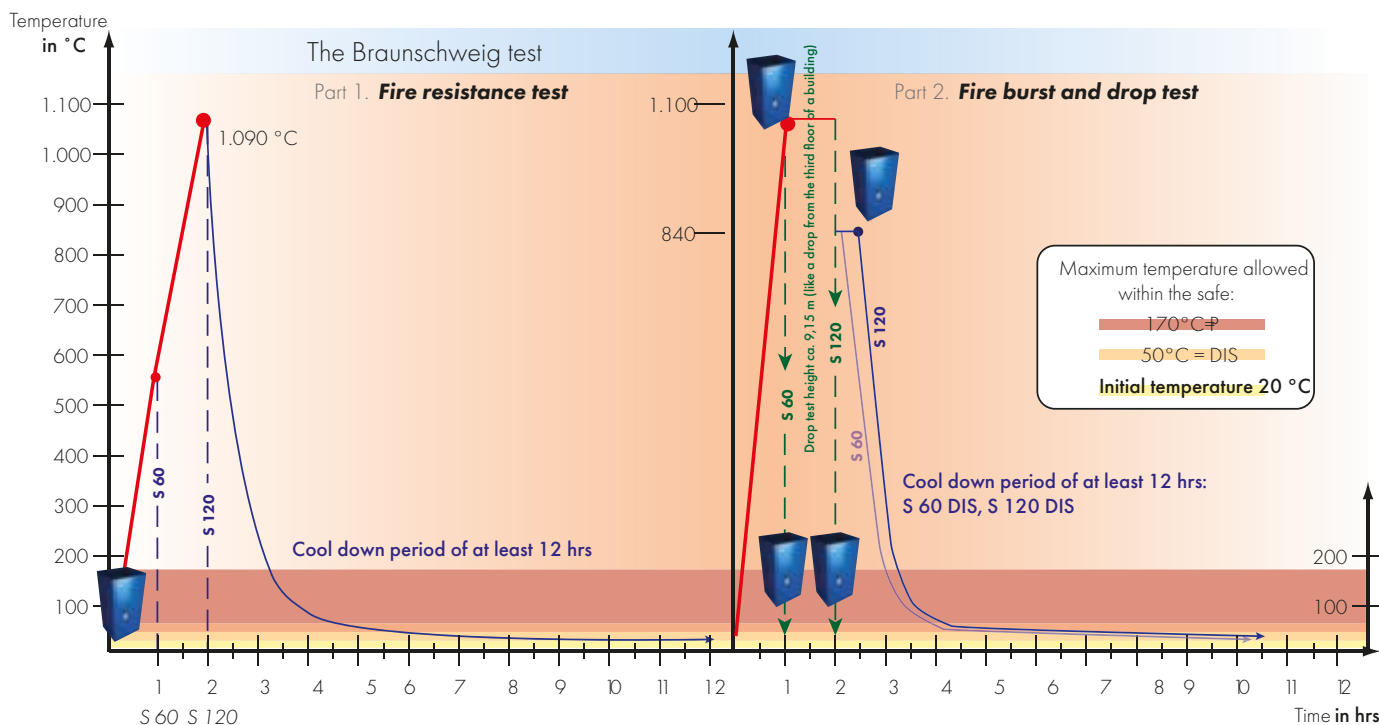

Fire-Protected Safes according to EN 15659 (light fire-proof cabinets)

So-called “light fire-proof cabinets” protect documents and valuables from heat for an exposure time of 30 or 60 minutes (fire protection LFS 30 P and LFS 60P).

The requirements of both of these fire grades therefore lie under S 60 P according to EN 1047-1. In this test the safes also have to undergo a fire resistance test – in this case up to 840°C. Fire burst and drop test are not subsequently carried out however. The humidity does not get taken into consideration. The inside temperature of the safe is not allowed to exceed 172°C.

Due to the permitted inside temperatures, safes with a fire protection of LFS 30 P and LFS 60 P are not suited to store discs and other electronic data carriers.

P = Suitable for heat sensitive paper documents with exposure limits of up to 170°C
DIS = Suitable for heat and humidity sensitive data carriers (discs) with exposure limits of up to 50°C and 85% humidity

For the fire resistance test the safe is heated up to a temperature of 1090°C for 60 or 120 minutes.



The safe then gets dropped a distance of 9,15 meters from the ground onto a bed of gravel or crushed stone. This equates to a drop out of a three-storey building that is on fire.



In the second part, the so-called fire burst and drop test, the safe is heated up to a temperature of about 1090 °C for a duration of 30 minutes.



Subsequently, the safe is again heated up to a temperature of 840 °C and is then left to cool down.



If a safe passes the test it receives one of the following fire-proof classes:

Quality grade	maximum temperature	maximum relative humidity
	within the safe during the test	
S 60 P	170°C	
S 120 P	170°C	
S 60 DIS	50°C	85 %
S 120 DIS	50°C	85 %

SÜPERB SAFES - The new elegant safe line

High-security and fire-proofed safes with a stylish interior.

Safes do more than keep your items secure. They help you to be comfortable and well-organized - day and night. SÜPERB SAFES by HARTMANN providing convenience, protection and most importantly peace of mind.

In a SÜPERB SAFES by HARTMANN your jewelry, your watches, your cash, your spare keys, your passports, your important documents, your mementos are well protected against all risks - additionally our safes can help create a better everyday life at your home. That's why we're here!

Resistance Grade:

Security level: Burglary proofed safe VdS-Class I according to EN 1143-1

Fire rating: Fire-protected safe according to EN 15659 LFS 30 P

Colours:

Pure White (RAL 9010)

White Aluminium (RAL 9006)

Dark Anthrazite (RAL 7024)

Lock:

Electronic-PIN-Code-Lock with mechanical Key

Drawer Inserts:

Drawer Inserts designed to perfectly organise your valuables. Available in dark and light micro fabric



Large



Medium



Small



Extra Small





Request your catalogue:
+971 4 380 8099
info@hartmann-safes.com



SECURITY IN ITS MOST ATTRACTIVE FORM

Design and safety are not a contradiction - the Signature Safes by HARTMANN are a perfect example. We are manufacturing these safe as per our customers dreams and expectations. 100% hand made. Give your home or your office a personal touch, without compromising in the up-to-date safety technology.



Opera House, Dubai, UAE



NH Collection,
The Palm Jumeirah, a Dubai, UAE



Etihad Tower,
Abu Dhabi, UAE



Sofitel Dubai the Obelisk,
Dubai, UAE



Assila Rocco Forte Hotel,
Jeddah, KSA



Kempinski Marsa Malaz Hotel,
Doha, Qatar



Sofitel Dubai the Palm, Dubai, UAE



Jumeirah Beach Hotel,
Dubai, UAE



Burj Khalifa,
Dubai, UAE



Burj Al Arab, Dubai, UAE



Bulgari Hotel, Dubai, UAE



Fairmont The Palm Hotel,
Dubai, UAE



Meydan Grand Stand,
Dubai, UAE



Story Hotels & Resorts
Beau Vallon, Seychelles



Intercontinental Hotel,
Dubai Marina, Dubai, UAE



Premier Inn Hotel,
Abu Dhabi, UAE



Al Baleed Resort by Anantara,
Salalah, Oman



Four Point Sheraton Hotel,
Sharjah, UAE



W Hotel, Dubai, UAE



Mondrian Hotel,
Doha, Qatar



Radisson Blu,
Dubai, UAE



Damac Towers by
Paramount Hotels & Resorts
Dubai, UAE



Sheraton Jumeirah
Beach Resort, Dubai, UAE



Four Season Hotel,
Dubai, UAE



Hilton Hotel, Dubai, UAE



The Opus by Omniyat,
Dubai, UAE



Palazzo Versace,
Dubai, UAE



Rixos Bab Al Bahr Hotel,
Ras Al Khaimah, UAE



Mandarin Oriental, Doha, Qatar



Terra Solis
Dubai, UAE



Marriott Hotel Abu Dhabi
Airport, Abu Dhabi, UAE



Ibis Hotel, Abu Dhabi, UAE

Ajman Palace Hotel - Ajman, UAE	Four Season Hotel - Dubai, UAE	Number One Tower Suites - Dubai, UAE
Ak-maral Hotel - Cholpon Ata, Kyrgyzstan	Fraser Suites - Riyadh, KSA	Nuran Marina Residences - Dubai, UAE
Al Abjar Hotels - Abu Dhabi, UAE	Gloria Hotel - Abu Dhabi, UAE	Oceanic Hotel - Fujairah, UAE
Al Baleed Resort by Anantara - Salalah, Oman	Goldman Sachs Lee Garden 3 - Hongkong	Oman Exhibition and Convention Center - Muscat, Oman
Al Bustan Palace Hotel - Muscat, Oman	Grand Continental Flamingo Hotel - Abu Dhabi, UAE	Orchid Hotel - Dubai, UAE
Al Bustan Rotana Hotel - Dubai, UAE	Grand Melia - Arusha, Tanzania	Palazzo Versace - Dubai, UAE
Aldar Properties - Abu Dhabi, UAE	Grand Millennium Al Seef - Basra, Iraq	Palm Yard Boutique Hotel - Manama, Bahrain
Al Faisaliah Resort and Spa, Durrat Riyadh - Riyadh, KSA	Gulf Medical College - Ajman, UAE	Paramount Hotels and Residences - Dubai, UAE
Al Hamra Palace Hotel - Waldorf Astoria, RAK, UAE	Hamad Medical Center - Doha, Qatar	Park Hyatt Hotel - Doha, Qatar
Alila Resort - Muscat, Oman	Hani Suites - Manama, Bahrain	Park Inn Olaya - Riyadh, KSA
Al Jawhara Hotel - Dubai, UAE	Hawthorn by Wyndham - Dubai, UAE	Premier Inn - Abu Dhabi, UAE
Al Manara, A Luxury Collection Resort - Aqaba, Jordan	Hilton Garden Inn - Dubai, UAE; Jubail, KSA	Radisson Blu Hotel - Dubai and Abu Dhabi, UAE; Jeddah and Riyadh, KSA; Lome, Togo; South Sudan, Africa
Andaz Dubai the Palm - Dubai, UAE	Hilton Hotel - Dubai and Abu Dhabi, UAE; Doha, Qatar	Raffles Wafi Hotel - Dubai, UAE
Aloft Hotel - Muscat, Oman	Hilton Hotel - Amman, Jordan	Ramada Hotel - Dubai, UAE; Doha, Qatar
Aloft Hotel - Dharan and Riyadh, KSA	Holiday Inn - Abu Dhabi, UAE; Jubail, KSA	Rayhaan Rotana Hotel - Muscat, Oman
Anantara Eastern Mangroves Hotel - Abu Dhabi, UAE	Hues Hotel - Dubai, UAE	Residence Inn by Marriott Al Jadaf - Dubai, UAE
Anantara Mina Al Arab Hotel - Ras Al Khaimah, UAE	Hyatt Andaz - Dubai, UAE	Rixos Bab Al Bahr Hotel - Ras Al Khaimah, UAE
Arabian Park Hotel - Dubai, UAE	Hyatt Hotel - Dubai, UAE; Riyadh and Makkah, KSA; Aqaba, Jordan; Addis Ababa, Ethiopia	Robertos Restaurant - Dubai, UAE
Ascott Palace - Dubai, UAE	Ibis Hotels - Dubai, Abu Dhabi and Fujairah, UAE; Jeddah, KSA	Rotana Hotel - Dubai, UAE; Karbala, Iraq
Ascott Park Palace Serviced Residence - Dubai, UAE	Indigo Hotel - Dubai, UAE	Royal Le Meridien Hotel - Abu Dhabi, UAE
Assila Rocco Forte Hotel - Jeddah, KSA	Intercontinental Hotel - Dubai, UAE	Royal Tulip - Muscat, Oman
Avani Palm View - Dubai, UAE	Jareed Hotel - Riyadh, KSA	Santorini Hotel - Ras Al Khaimah, UAE
Banyan Tree - Doha, Qatar	Jumeirah Al Naseem Hotel - Dubai, UAE	Shangri-La Hotel - Dubai, UAE
Bavaria Les Acacias Hotel - Dubai, UAE	Jumeirah Al Qasr Hotel - Dubai, UAE	Sharjah Palace Hotel - Sharjah, UAE
Bin Majid Hotel - Ras Al Khaimah, UAE	Jumeirah Beach Hotel - Dubai, UAE	Sheraton Hotel - Dubai and Sharjah, UAE
Boutique 7 Hotel - Dubai, UAE	Jumeirah Etihad Towers Hotel - Abu Dhabi, UAE	Sofitel Dubai the Palm - Dubai, UAE
Broadway Hotel - Dubai, UAE	Jumeirah Mina A'Salam - Dubai, UAE	Sofitel Dubai the Obelisk - Dubai, UAE
Bulgari Hotel - Dubai, UAE	Jumeirah at Saadiyat Island Resort - Abu Dhabi, UAE	SLS Dubai Hotel and Residences - Dubai, UAE
Burj Al Arab Hotel - Dubai, UAE	Kempinski Marza Malaz Hotel - The Pearl Doha, Qatar	Story Hotels & Resorts - Beau Vallon, Seychelles
Carlton Down Town Hotel - Dubai, UAE	Landmark Hotels and Suites - Dubai, UAE	St.Regis Hotel - Abu Dhabi, UAE
City Seasons Hotels - Dubai, Abu Dhabi and Al Ain UAE; Muscat, Oman	Langham The Palm Jumeirah - Dubai, UAE	Telal Resort - Al Ain, UAE
Citymax Hotel - Dubai, UAE	Layia Hospitality - Dubai and Sharjah, UAE	Terra Solis - Dubai, UAE
Conrad Hotel - Dubai, UAE	Le Domaine de L'Orangerie Resort and Spa - Seychelles	Time Oak Hotel - Dubai, UAE
Cophthorne Hotel Port Saeed Deira - Dubai, UAE	Le Meridien Hotel - Dubai and Fujairah, UAE	The 8 - Dubai, UAE
Coral Beach Hotel - Ajman and Sharjah, UAE	Liyat Beach Resort - Abu Dhabi, UAE	The Address Jumeirah Resort - Dubai, UAE
Coral Deira Hotel - Dubai, UAE	Mandarin Oriental Hotel - Dubai, UAE; Doha, Qatar	The Capitol Kempinski Hotel - Singapore
Corp Amman Hotel - Amman, Jordan	Marriott Hotel - Dubai and Abu Dhabi, UAE; Riyadh, KSA; Algiers, Algeria	The K Hotel - Juffair, Bahrain
Cosmopolitan Hotel - Dubai, UAE	Media One Hotel - Dubai, UAE	The Meadows Village - Dubai, UAE
Cristal Amaken Hotel - Riyadh, KSA	Mercure Grand Hotel - Al Ain, UAE	The Opus by Omniyat - Dubai, UAE
Crowne Plaza Hotel - Dubai and Abu Dhabi, UAE; Sohar, Oman	Metropolitan Hotel - Dubai, UAE	University of Sharjah - Sharjah, UAE
Damac Hotel - Dubai, UAE	Millennium Cophthorne Hotel - Dubai and Sharjah, UAE	Urban Al Khoory Hotels - Dubai, UAE
Dubai Opera - Dubai, UAE	Millennium Plaza Hotel - Dubai, UAE	Versailles Hotel - Dubai, UAE
Dubai Parks and Resorts - Dubai, UAE	Mondrian Hotel - Doha, Qatar	Viceroy Hotel Apartment - Abu Dhabi, UAE
Etihad Airways - Abu Dhabi, UAE	Monte Carlo Beach Club - Abu Dhabi, UAE	Vision Hotel Apartment - Abu Dhabi, UAE
Ewan Hotel - Amman, Jordan	Movenpick Laguna Tower - Dubai, UAE	Voco Hotel - Riyadh, KSA
Fairmont Hotel - Dubai and Abu Dhabi, UAE	Movenpick - Media City Dubai, UAE	W Hotel - Dubai, UAE; Amman, Jordan
Fitness First - Dubai, UAE	NH Collection The Palm - Dubai, UAE	Waldorf Astoria Hotel - Platte Island, Seychelles
Five Hotel - Dubai, UAE	Nobu Hotel - Riyadh, KSA	Westin Hotel - Dubai, UAE
Flora Park Hotel - Dubai, UAE	Novotel - Abu Dhabi and Fujairah, UAE	Wild Wadi Waterpark - Dubai, UAE
Four Point Sheraton - Sharjah, UAE		

HARTMANN TRESORE MIDDLE EAST LLC

**Telephone:**

+971 4 338 5859

**Email:**

info@hartmann-safes.com

**Website:**

www.hartmann-safes.com

**Showroom:**

P.O. Box 102 761, Dubai, United Arab Emirates

**Whatsapp**

+971 50 556 0362

**Online Shop**

www.hartmann-safes.store

**LinkedIn**

@hartmanntresoresafesme

**Facebook**

@HartmannTresoreMiddleEast

**Instagram**

@hartmanntresoresafesme



Please scan QR Code to visit our website.

Errors, misprints, variations in dimension and weight, and design changes that serve technical progress purposes are reserved. Some images may be shown with optional and not included accessories.